


M

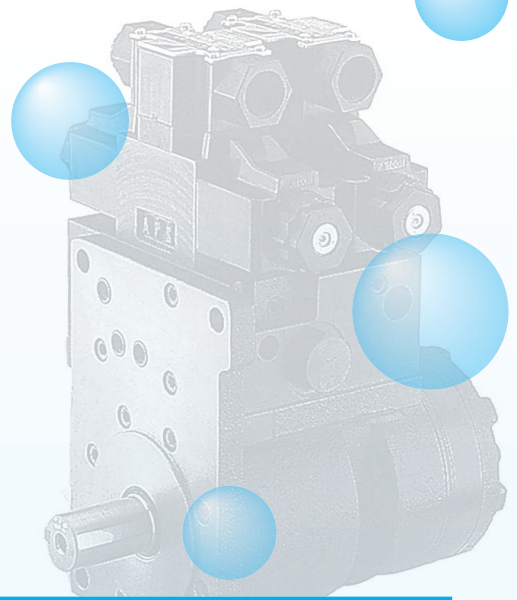

ポジショニングモータ

POSITIONING MOTORS

| 【基本形式】 | 定格圧力 MPa {kgf/cm ² } | 理論出力トルク N·m {kgf·m} | | | 掲載頁 |
|--------|---------------------------------------|------------------------|-----|-----|-----|
| | | 50 | 100 | 150 | |
| TM05 | 3.5 {35} | 24 { 2.4} | | | M-2 |
| | 5 {50} | 34 { 3.4} | | | |
| | 7 {70} | 48 { 4.8} | | | |
| TM10 | 3.5 {35} | 43 { 4.3} | | | |
| | 5 {50} | 61 { 6.1} | | | |
| | 7 {70} | 86 { 8.6} | | | |
| TM13 | 3.5 {35} | 58 { 5.8} | | | |
| | 5 {50} | 82 { 8.2} | | | |
| | 7 {70} | 115 {11.5} | | | |
| TM19 | 3.5 {35} | 82 { 8.2} | | | |
| | 5 {50} | 117 {11.7} | | | |
| | 7 {70} | 164 {16.4} | | | |